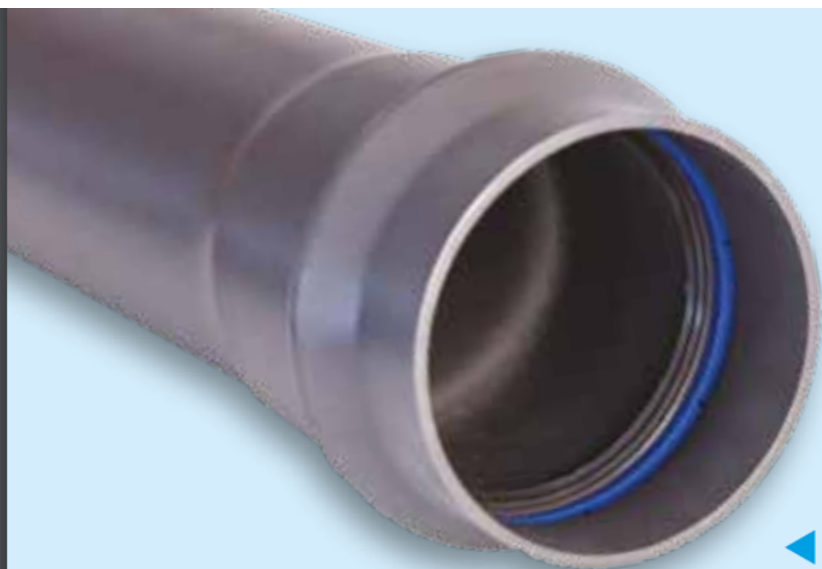




Plafondpress

UNI EN 1452-2

**TUBI IN PVC RIGIDO COLORE GRIGIO RAL 7011
PER ACQUEDOTTI ED IRRIGAZIONE**

***PVC RIGID PIPES GRAY RAL 7011 COLOR
FOR WATER DISTRIBUTION NETWORK AND IRRIGATION***

◀ p. 4

Tubi in PVC UNI EN 1452-2 per condotte di fluidi in pressione, rispondenti alle prescrizioni igienico-sanitarie del Ministero della Sanità (D.M. 174 del 6 aprile 2004).

Colore: grigio RAL 7011 - Lunghezza totale compreso bicchiere: 6 m. Le barre sono fornite con bicchiere ad anello elastomerico o lisce, solamente su richiesta.

Pipes of rigid PVC UNI EN 1452-2 for pressure use conforming to the sanitary rule of Ministry of Health (M.D. 174 of the 6 april 2004).

Color: gray RAL 7011 - Total lenght: 6 meters. Pipes are available with rubber gasket or plain ends only on request.

Diametro esterno Outside Diameter mm	PN6 (SDR 33)		PN10 (SDR 21)		* PN12,5 (SDR 17)		PN16 (SDR 13,6)		* PN20 (SDR 11)		Guarnizioni Gasket prezzo netto net price €/cad.
	Spessore Thickness mm	€/m	Spessore Thickness mm	€/m	Spessore Thickness mm	€/m	Spessore Thickness mm	€/m	Spessore Thickness mm	€/m	
** 16	–	–	–	–	–	–	–	–	1,5	0,98	–
** 20	–	–	–	–	–	–	1,5	1,18	1,9	1,45	–
25	–	–	–	–	–	–	1,9	1,83	2,3	2,21	–
32	–	–	1,6	1,49	1,9	1,73	2,4	2,09	2,9	2,47	–
40	1,5	1,65	1,9	2,01	2,4	2,54	3,0	2,99	3,7	3,61	–
50	1,6	2,21	2,4	3,15	3,0	3,90	3,7	4,62	4,6	5,65	–
63	2,0	3,40	3,0	4,88	3,8	6,21	4,7	7,35	5,8	8,94	0,23
75	2,3	4,71	3,6	6,99	4,5	8,93	5,6	10,43	6,8	12,53	0,29
90	2,8	6,51	4,3	9,17	5,4	11,41	6,7	13,68	8,2	16,42	0,39
	PN6 (SDR 41)		PN10 (SDR 26)		PN12,5 (SDR 21)		PN16 (SDR 17)		* PN20 (SDR 13,6)		
110	2,7	7,77	4,2	11,11	5,3	13,93	6,6	16,78	8,1	20,51	0,57
125	3,1	10,17	4,8	14,29	6,0	17,71	7,4	21,40	9,2	26,41	0,68
140	3,5	12,74	5,4	18,03	6,7	22,56	8,3	26,87	10,3	33,09	0,82
160	4,0	16,49	6,2	23,63	7,7	29,58	9,5	35,07	11,8	43,21	1,05
180	4,4	20,55	6,9	29,46	8,6	38,05	10,7	44,41	13,3	53,71	1,38
200	4,9	25,25	7,7	36,54	9,6	46,03	11,9	54,82	14,7	67,36	1,48
225	5,5	31,94	8,6	45,91	10,8	58,10	13,4	69,53	16,6	85,31	2,34
250	6,2	40,08	9,6	56,99	11,9	71,09	14,8	85,38	18,4	103,69	2,58
280	6,9	49,77	10,7	71,24	13,4	89,67	16,6	107,52	20,6	–	3,75
315	7,7	62,63	12,1	90,93	15,0	112,26	18,7	136,41	23,2	–	4,62
355	8,7	82,85	13,6	121,08	16,9	149,89	21,1	182,95	26,1	–	6,31
400	9,8	105,32	15,3	154,02	19,1	192,22	23,7	231,82	29,4	–	7,70
500	12,3	166,71	19,1	242,32	23,9	301,77	29,7	360,38	36,8	–	–
630	15,4*	259,10	24,1*	443,91	30,0*	473,17	–	–	–	–	–

* solo su richiesta / only on request



** tubo liscio senza bicchiere / straight pipe without socket

Raccordi di PVC rigido per condotte di fluidi in pressione PN 10.


Bicchieri con anello elastomerico.

Rigid PVC pipe fittings for water pipes of working fluids PN 10.

Socket with elastomeric ring.

per tubi Ø for pipes Ø		63	75	90	110	125	140	160	180	200	225	250	280	315	
	curve a 11° - 22° - 30° - 45° bends 11° - 22° - 30° - 45°	€	17,60	21,49	29,65	41,23	56,04	71,56	96,11	222,88	209,15	306,52	404,75	576,73	684,02
	curve a 90° bends 90°	€	18,19	22,25	31,66	50,85	66,20	92,43	114,12	254,91	263,62	360,41	446,52	856,25	1.086,14
	manicotto scorrevole sliding coupling	€	12,36	15,67	18,34	23,96	27,89	35,37	48,12	66,79	77,60	105,82	139,54	186,57	249,27
	TI 90° Tee 90°	€	43,24	56,44	68,47	90,05	133,11	164,62	201,57	387,29	430,76	507,98	741,84	1.022,39	1.401,59
	riduzione reducer	€	-	-	90x75	110x75/90	125x110	140x110	160x110	200x160	-	-	-	-	
					25,90	29,99	41,57	86,56	105,48	-					133,64
	** monogiunto flangiato flanged adaptor	€	26,70	34,27	42,60	57,88	85,69	97,78	120,89	352,28	196,61	238,26	319,09	439,13	495,93
	** adattatore maschio flangiato flanged spigot	€	22,63	30,76	36,63	50,35	76,84	89,00	105,51	292,77	174,13	220,25	280,36	398,40	410,69
tubi per bancale n° pipes for pallets n°			224	149	104	72	56	42	42	36	30	25	20	16	12

** Foratura UNI 2223 - Drilled UNI 2223


**PLAFONDPRESS**

I nostri tubi in PVC UNI EN 1452-2 sono corredati di guarnizione elastomerica pre-inserita.

Each pipe is complete with rubber sealing ring.

**PVC - NORMA
UNI EN 1452-2**

N. 650/001

**Plafondpress PLUS**Anello di tenuta anger-lock bloccata e a richiesta.
Power-lock montata a caldo.Integrated ring: Anger-lock.
Power-lock: pre-inserted with heating process.